




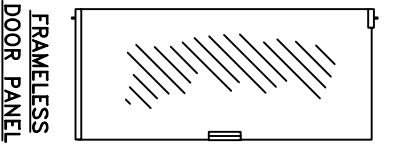


VERTICAL CROSS SECTIONS

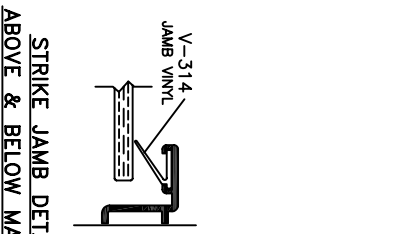

- NOTES:
1. The 4033 strike jamb magnet (4" long) should be centered in the jamb with V-314 jamb seal vinyl above and below it (see detail).
  2. If 1/4" thick door glass is used in place of the standard 3/16" thickness, then substitute V-308 vinyl in place of V-257 glazing vinyl.

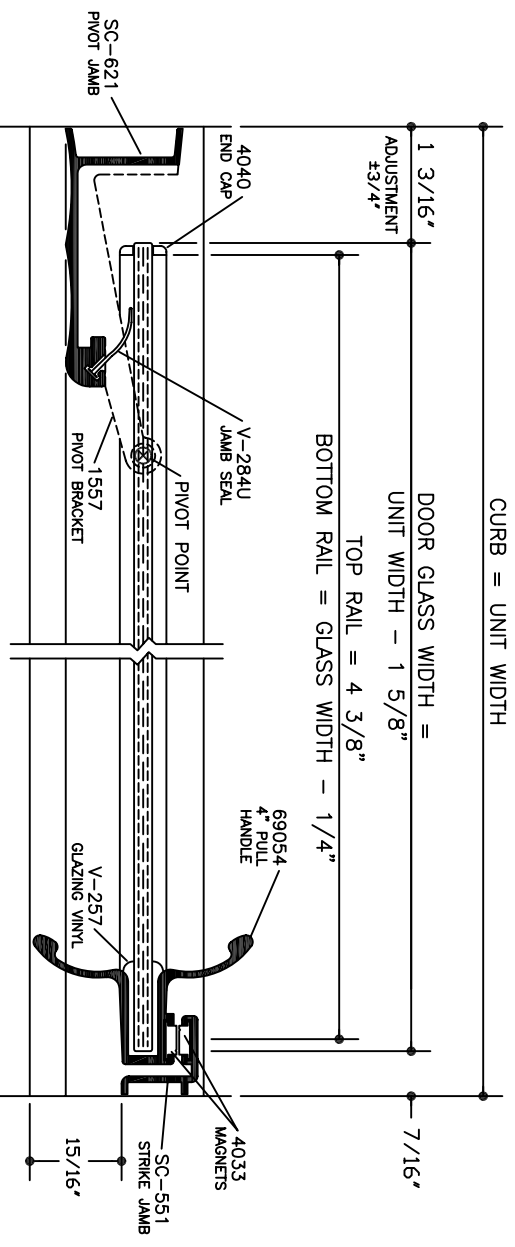

HORIZONTAL CROSS SECTION

1/2 SIZE DETAIL

NOTE: Glazing material for all KD units and Glazed units must conform to Ansi Z97.1 and CPSC Standard 16 CFC 1201 Category I and II.

EPH-N00-06106  
DATE: 4-26-05

SERIES

338

FRAMELESS  
PIVOT DOOR



BATH ENCLOSURES

a product of ALCOA

PO Box 40 - Magnolia, AR 71754-0040 - (870) 234-4260  
www.alumaxbath.com